
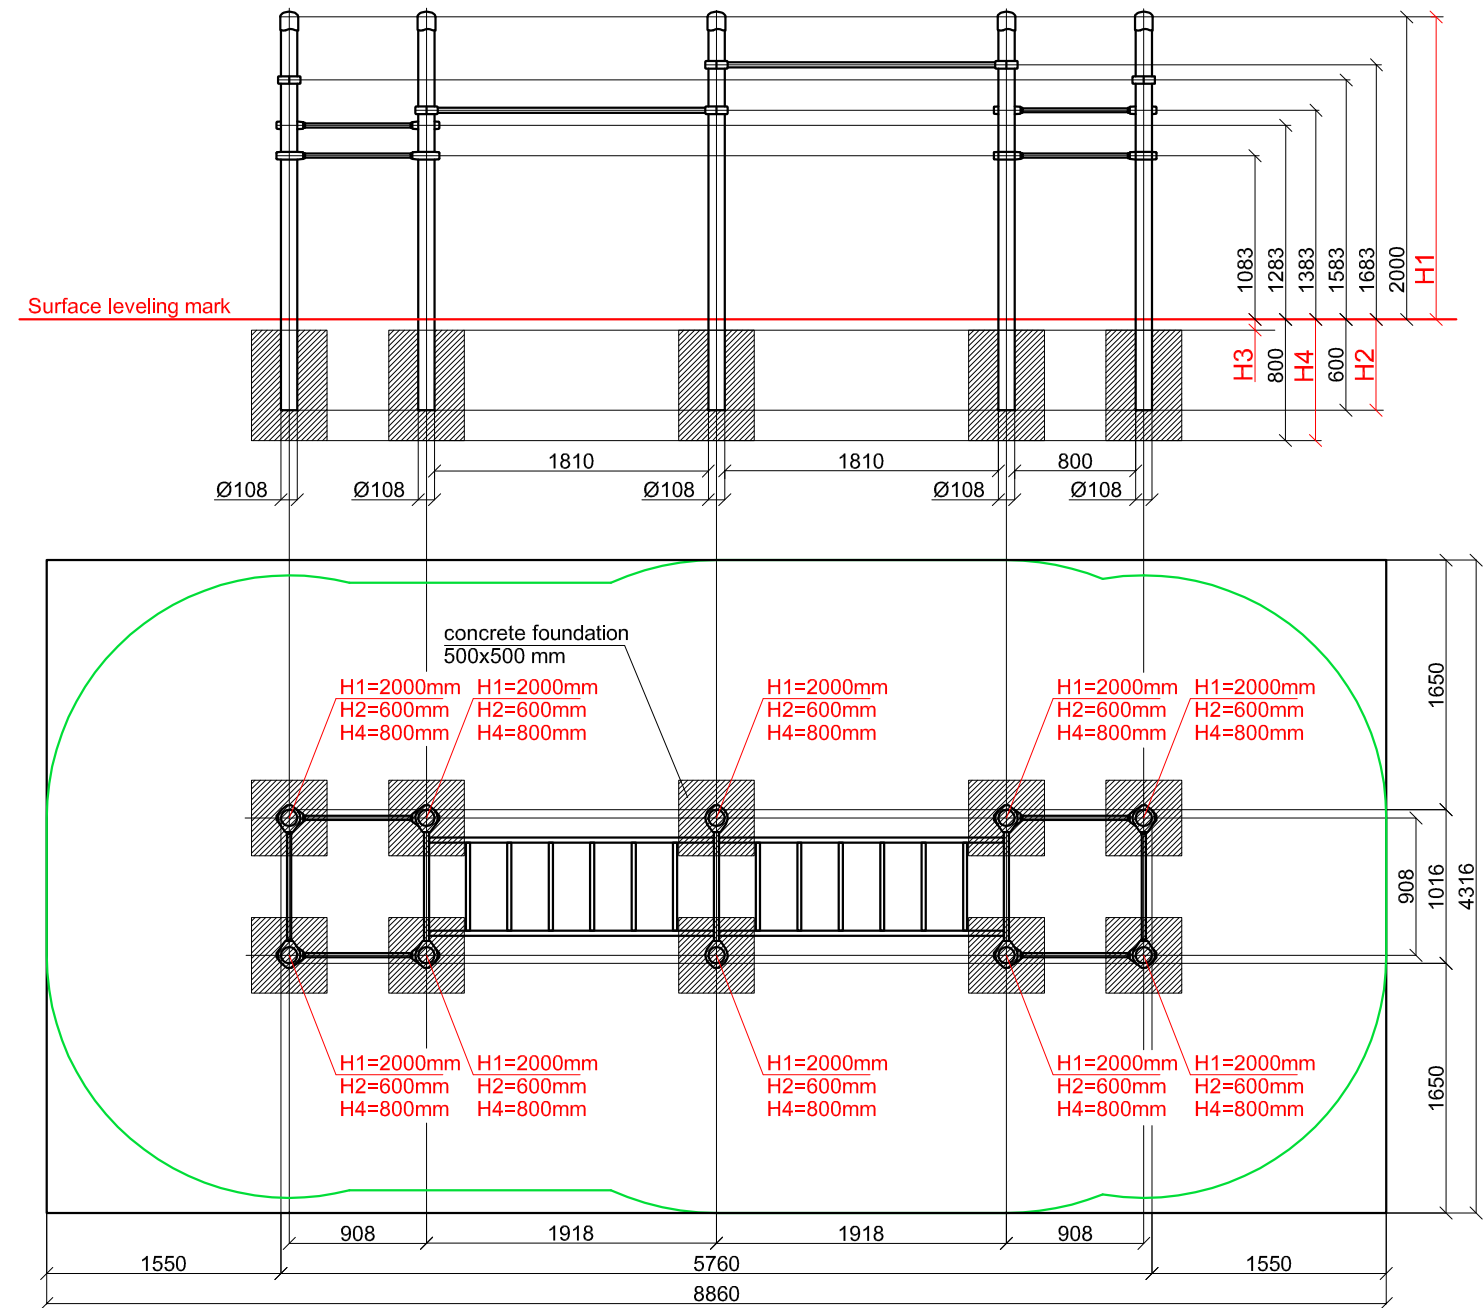



SCALE 1:50



LTD "KENGURU PRO"
Address: Lauteres street 4, Riga, Latvia, LV-1002
VAT Reg. No. 40103750152
Bank: LUMINOR A/S , SWIFT: RIKOLV2X ,
Bank Account: LV65RIKO0002930161161
e-mail: info@kengurupro.eu
www.kengurupro.eu

K-003_kids

Dikson


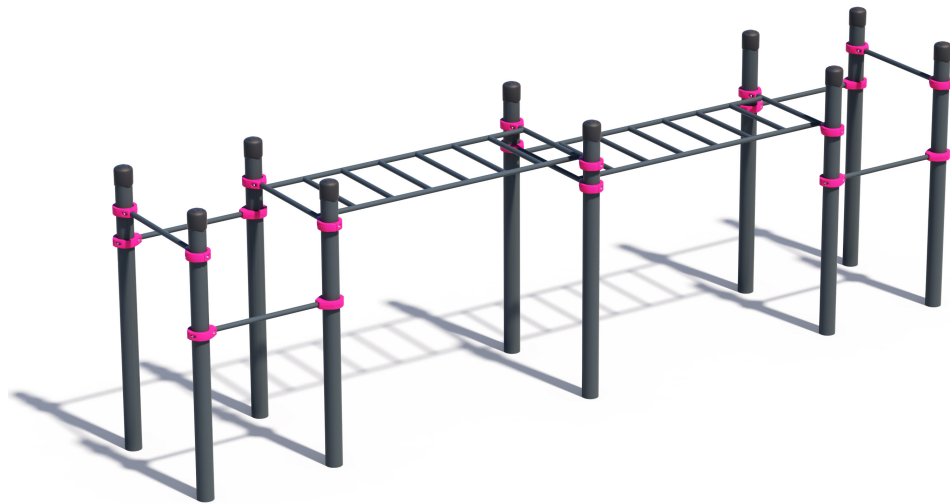


The complex consists of ten vertical columns, six crossbar with the lenght of 800mm and two horizontal monkey bars of different height. Lenght of the monkey bar 1952mm, width 800mm, distance between crossbars is 274mm. The complex is secured together with aluminium clamps.

Installation instructions:

- Choose a suitable underground for the unit **according EN1176-1 annex I table I.1**
- Prepare the construction pit with a drilling machine or other devices.
- Before pouring the concrete all structures elements must be leveled and fixed.
- Complex elements must be fixed and bolted together with metal clamps.
- Ready-made C25 concrete should be used.
- Crossbars installation height can be changed according to customer's wishes.
- Approximately 0,15m³ concrete is needed for each spot foundation.
- Under the structures we recommend to install absorbing rubber cover.

The size of the hole for the foundation is depending on the consistency of the ground. The dimensions mentioned above are applicable for normal conditions with firm ground. If the ground is extremely soft, a much bigger foundation is needed. Use only appropriate material and follow the installation instructions closely!!!

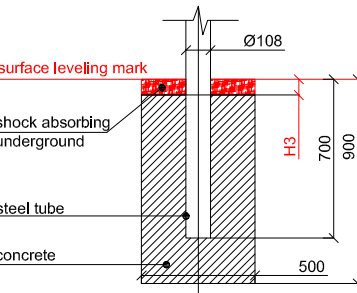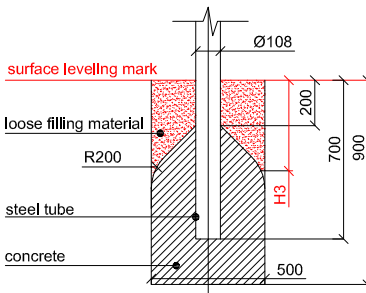Foundation plan and area of movement				Technical information		
Foundation when using Shock absorbing underground (syntethic – rubber granulates)		Beveling of foundation when using loose filling material		width:	1016 mm	
				height:	2050 mm	
				lenght:	5760 mm	
H3	Drop height	H3	Drop height	largest part:	2650 mm	
40 mm	> 1.2.....1.4 m	20 cm	< 1.0 m	weight:	330 kg	
50 mm	> 1.5.....1.7 m	30 cm	< 2.0 m	floor space required	8860 x 4316 mm	
60 mm	> 1.8.....2.0 m	40 cm	< 3.0 m	pipe measurements:	diameter:	wall thickness:
70 mm	> 2.1.....2.5 m				108 mm	3.2 mm
				33.7 mm	3.2 mm	
				metal parts:	steel, galvanized, powder coated RAL 7016 (anthracite grey)	
				metal clamps:	aluminium, powder coated, RAL 4010 (Telemagenta)	
				bolts for metal clamps	stainless steel, Pin Hex Button Head Security Screws M10	
				max. free fall height:	< 1683 mm	EN1176-1 annex I table I.1
				user age:	3-14 years	
				certificates:	TÜV Rheinland InterCert Kft.	